
## The ReWater® Irrigation System & **Automatic Filter**



ReWater Systems P.O. Box 19364 Thousand Oaks, CA 91319 (805) 716-0104

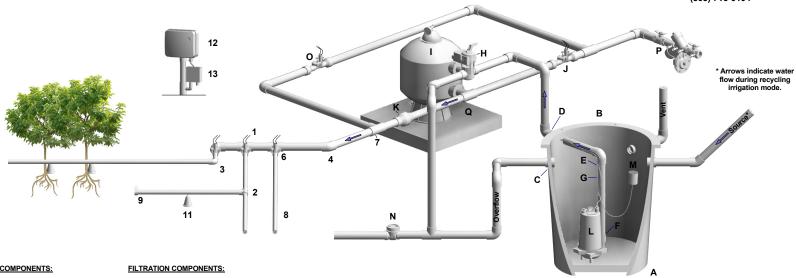

## **IRRIGATION COMPONENTS:**

- 1" 24 VAC Solenoid Valves
- Tees
- 90 deg. Elbows
- 45 deg. Elbows 1" Threaded Male Adapters
- Slip Reducers
- Reducing Tees
- Polyethylene Tubing (16mm, 19mm) Figure 8 ends for Poly Tubing

- Compression Rings
   Rewater Trademark Emitters
- 12. Rewater Trademark Controller13. 24 VAC / 120 VAC Relay Junction Box.
- A. Surge Tank (70 gal. 24"x36"; 110 gal. 30"x36")B. Lid w/SS Screws and Gasket material
- Bulkhead Adapters (4/2"; or 2/2" and 2/3")
- Electrical Tension Grommets
- Nylon Tie Straps
- 2" Threaded Male Adapter
- 2" Discharge Pipe
- H. 3-Way Tee Valve w/24 VAC Actuator
- Fiberglass Filter Vessel
- Solenoid Valve for backwash
- 1 1/2" Swing Check Valve
- 1/2 hp Submersible Pump w/ 20' cable 24 VAC Float Switch w/ 20' cable
- Backflow Valve w/ viewing port (2"; or 3")
- O. Solenoid Valve for irrigation (1"; or 1 1/2")
  P. Reduced Pressure Principle Device (1"; or 1 1/2")
  Q. Platform ( Optional)

WARRANTY: warranties it's entire system to be free of defects for two

CAUTION: This system was designed by ReWater for a specific project that included numerous factors not found on other sites. It is not suitable for any other project and may not be used as such. It is only provided to understand how a particular type of ReWater system flows.